




**HOHMANN & BARNARD, INC.**  
A MiTek - BERKSHIRE HATHAWAY COMPANY

# Veneer Anchor Plates

## HB-200/DA-213

### Adjustable Veneer Anchor

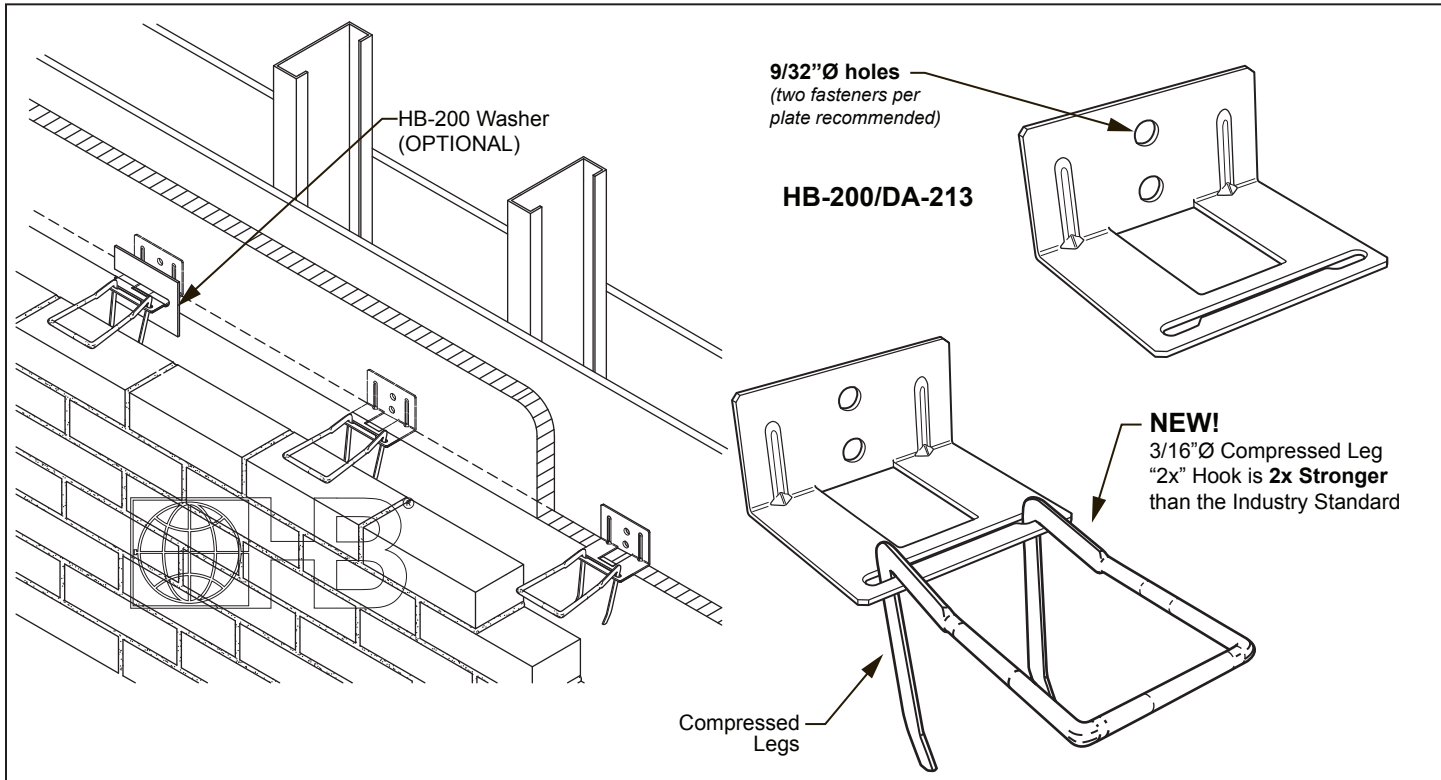

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

**H&B RECOMMENDS 16" X 16" SPACING**

**HB-200/DA-213** is designed to anchor masonry to a structure, accommodating rigid insulation up to 6 inches (75mm) thick. Furnished with two 9/32"Ø holes.

**Now featuring H&B's Compressed Leg Hooks, proven to provide 2x the strength required by industry standards.**

**NOTES:**

- Custom dimensions/gauges available on special order
- State overall wall size & cavity or insulation thickness when ordering
- Two fasteners per plate recommended
- Needs 3/4 inch (19mm) to 1 inch (25mm) minimum air cavity
- For attachment to concrete, block or brick see 523 Brass Expansion Bolt

**MATERIAL CONFORMANCE**

**Wire (Carbon Steel):**

Cold-drawn steel wire conforming to **ASTM A82/A82M**:  
Tensile Strength - 80,000 psi | Yield Point - 70,000 psi minimum  
Zinc Coating:

Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B2** (1.5 oz/ft<sup>2</sup>)  
NOTE: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft<sup>2</sup>

**Wire (Stainless Steel):**

**ASTM A580/A580M** - AISI Type 304 (Type 316 available special order)

**H&B manufactures steel wire products from a minimum of 95% post-consumer recycled material.**

**Sheet Metal (Carbon Steel): ASTM A1008/A1008M**

Zinc Coating: Hot-Dip Galvanized: (refer to wire above)

**Sheet Metal (Stainless Steel):**

**ASTM A 666, ASTM A480, ASTM A240/A240M, and ASTM A167 - AISI Type 304** (Type 316 available on special order)

**HB-200/DA-213 Anchor Backplate Finish:**

- Hot-Dip Galvanized
- Stainless Steel

**H&B recommends Stainless Steel for maximum protection against corrosion**

**Backplate Style** (Equal to combined thickness of insulation and/or wallboard):

- |   |   |
|---|---|
| <input type="checkbox"/> HB-200/DA-213 (0")     | <input type="checkbox"/> HB-200/DA-213 (3 1/2") |
| <input type="checkbox"/> HB-200/DA-213 (1")     | <input type="checkbox"/> HB-200/DA-213 (4")     |
| <input type="checkbox"/> HB-200/DA-213 (1 1/2") | <input type="checkbox"/> HB-200/DA-213 (4 1/2") |
| <input type="checkbox"/> HB-200/DA-213 (2")     | <input type="checkbox"/> HB-200/DA-213 (5")     |
| <input type="checkbox"/> HB-200/DA-213 (2 1/2") | <input type="checkbox"/> HB-200/DA-213 (5 1/2") |
| <input type="checkbox"/> HB-200/DA-213 (3")     | <input type="checkbox"/> HB-200/DA-213 (6")     |
| <input type="checkbox"/> CUSTOM Backplate _____ |   |

**Backplate Thickness:**

- 14 ga. (1.9 mm)
- 12 ga. (2.7 mm)
- CUSTOM \_\_\_\_\_

**3/16"Ø Compressed Leg Hook Length:**

- 3" (300H-2X)
- 4" (400H-2X)
- 4 3/4" (475H-2X)
- Other \_\_\_\_\_

**HOHMANN & BARNARD, Inc.**  
CORPORATE HEADQUARTERS  
30 Rasons Court | Hauppauge, NY 11788  
T: 800.645.0616 F: 631.234.0683  
[www.h-b.com](http://www.h-b.com)

**Branch/Subsidiary Locations:**  
ALABAMA - ILLINOIS - MARYLAND  
NEW YORK - PENNSYLVANIA - TEXAS  
CANADA

© HOHMANN & BARNARD, INC. - 2012